

Maintenance Kit Installation Guide:

1280 8068 59

1280 8068 79

1280 8068 94

Oil Water Separator



1

Before starting assembly, please check contents are as follows:

- 1 filter (remove from plastic bag)
- 1 White prefilter bag
- 2 Metal retaining springs
1280 8068 59 = 1 x 170 mm
1280 8068 79 = 1 x 250 mm
1280 8068 94 = 2 x 400 mm

Service interval kit containing:

- Molded plastic mount + screw
- Printed card
- Self-adhesive timestrip

General Installation notes

- Please ensure a steady fall in the pipe run from the outlet point to the sanitary drain.
- When used in conjunction with timed solenoid drain, set

drain "open" duration to minimum setting (1-2 seconds).

- When used in conjunction with motorized ball valve or high capacity drain (ie Drain-all®) a de-pressurization chamber must be installed between drain and T-SEP unit.
- Never discharge condensate to a storm drain or to surface water; always connect to a sanitary drain or sewer.
- Remember that it's the user's responsibility to check with the local authority as to the permissible discharges in their area.

Testing Quality

- Replace filters before outlet cloudiness exceeds the ppm limit for your region.
- Test outlet quality weekly using kit provided.

Service Indicator – Assembly and Attachment



i Insert the boss on the reverse of the mount (**c**) into the pre-drilled hole in the separator lid.

ii Peel backing from timestrip (**a**) and attach to the plastic card (**b**) within the dotted lines.

iii Flex the card, passing the ends through the slots on the top surface of the mount.

To activate, press firmly on the timestrip label at the point indicated.

After a few minutes, a red line will appear, to indicate 'time in service' up to 12 months.

A replacement card and timestrip will be supplied with each service kit.



T-SEP Maintenance Kit

Installation Manual: 1280 8068 59 / 1280 8068 79 / 1280 8068 94



2

Remove plastic bag and insert the filter bag (white netting with tied top) pushing it gently but firmly down to the base of the un



3

Insert the metal retainer(s) with bent ends facing towards. Slide down until it touches the top of the filter bag. DO NOT compress the filter bag.



4

Remove the plastic bag and insert the second filter bag (needle-felt bag with black inlet tube) and rest it on top of the retainers.




5

Connect the filter tube to the inlet block.



6

Attach the twist off grab tap to the test point. Attach your outlet hose to the nipple above. Fill unit with water and check for leaks.

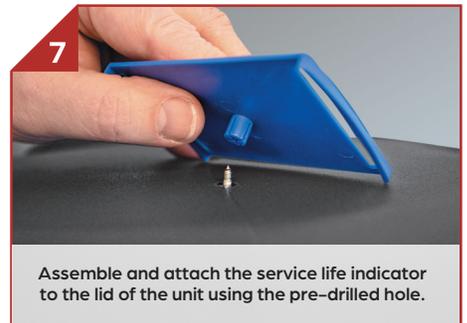

7

Assemble and attach the service life indicator to the lid of the unit using the pre-drilled hole.



1280 8987 35, 1280 8987 36
& 1280 8987 37

Charlotte, North Carolina, USA
Phone: +704 897 2182
Email: support@airandgassolutions.com

St. Catharines, Ontario, Canada
Phone: +905 684 6266
Email: canadasupport@airandgassolutions.com

Technical specifications subject to change without notice.
©2025 Air and Gas Solutions LLC
Trident Publication Ref: 1280 8068 59-1280 8068 94-US-EN-Rev-000